

DuPont™ Zytel® FE270038 BK267

NYLON RESIN

Product Information

Common features of Zytel® nylon resin include mechanical and physical properties such as high mechanical strength, excellent balance of stiffness and toughness, good high temperature performance, good electrical and flammability properties, good abrasion and chemical resistance. In addition, Zytel® nylon resins are available in different modified and reinforced grades to create a wide range of products with tailored properties for specific processes and end-uses. Zytel® nylon resin, including most flame retardant grades, offer the ability to be coloured.

The good melt stability of Zytel® nylon resin normally enables the recycling of properly handled production waste. If recycling is not possible, DuPont recommends, as the preferred option, incineration with energy recovery (-31kJ/g of base polymer) in appropriately equipped installations. For disposal, local regulations have to be observed.

Zytel® nylon resin typically is used in demanding applications in the automotive, furniture, domestic appliances, sporting goods and construction industry.

Zytel® FE270038 is a 40% glass fiber/mineral reinforced, heat stabilized Polyamid 66 for injection molding. It is well suited for water injection technology.

General information	Value	Unit	Test Standard
Resin Identification	PA66-(GF+MD)40	-	ISO 1043
Part Marking Code	PA66-(GF+MD)40	-	ISO 11469
Rheological properties	dry / cond	Unit	Test Standard
Molding shrinkage, parallel	0.3 / -	%	ISO 294-4, 2577
Molding shrinkage, normal	0.7 / -	%	ISO 294-4, 2577
Mechanical properties	dry / cond	Unit	Test Standard
Tensile Modulus	8800 / 7800	MPa	ISO 527-1/-2
Stress at break	145 / 110	MPa	ISO 527-1/-2
Strain at break	2.5 / 2.6	%	ISO 527-1/-2
Tensile creep modulus			ISO 899-1
1h	* / 7000	MPa	
1000h	* / 6000	MPa	
Charpy impact strength			ISO 179/1eU
73°F	41 / 41	kJ/m ²	
-22°F	40 / 40	kJ/m ²	
Charpy notched impact strength			ISO 179/1eA
73°F	4 / 4	kJ/m ²	
-22°F	4 / 3	kJ/m ²	
Thermal properties	dry / cond	Unit	Test Standard
Melting temperature, 18°F/min	245 / *	°C	ISO 11357-1/-3
Glass transition temperature, 18°F/min	90 / -	°C	ISO 11357-1/-2
Temp. of deflection under load, 260 psi	230 / *	°C	ISO 75-1/-2
Coeff. of linear therm. expansion, parallel	23 / *	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	60 / *	E-6/K	ISO 11359-1/-2
Thermal conductivity of melt	0.26	W/(m K)	-
Spec. heat capacity of melt	2280	J/(kg K)	-
Flammability	dry / cond	Unit	Test Standard
Burning Behav. at 60mil nom. thickn.	HB / *	class	IEC 60695-11-10
Thickness tested	1.5 / *	mm	IEC 60695-11-10
FMVSS Class	B	-	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	<100	mm/min	ISO 3795 (FMVSS 302)
Electrical properties	dry / cond	Unit	Test Standard
Volume resistivity	8E12 / 2E10	Ohm*m	IEC 62631-3-1
Surface resistivity	* / 3E14	Ohm	IEC 62631-3-2
Electric strength	41 / 41	kV/mm	IEC 60243-1
Other properties	dry / cond	Unit	Test Standard
Humidity absorption, 80mil	1.5 / *	%	Sim. to ISO 62
Water absorption, 80mil	5 / *	%	Sim. to ISO 62

Revised: 2017-05-16

Page: 1 of 13

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Asia Pacific

Europe/Middle East/Africa

DONGGUAN FUMEI PLASTICS CO.,LTD.

TEL: +86 0769-82339888 / 87798999

EMAIL: fumei@foomx.com



Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

DuPont™ Zytel® FE270038 BK267

NYLON RESIN

Density	1460 / -	kg/m ³	ISO 1183
Density of melt	1300	kg/m ³	-
Injection	dry / cond	Unit	Test Standard
Drying Recommended	yes	-	-
Drying Temperature	≥80	°C	-
Drying Time, Dehumidified Dryer	2 - 4	h	-
Processing Moisture Content	≤0.2	%	-
Melt Temperature Optimum	290	°C	-
Min. melt temperature	280	°C	-
Max. melt temperature	300	°C	-
Max. screw tangential speed	0.2 / *	m/s	-
Mold Temperature Optimum	100	°C	-
Min. mold temperature	70	°C	-
Max. mold temperature	120	°C	-
Hold pressure range	50 - 100	MPa	-
Hold pressure time	3	s/mm	-
Ejection temperature	210	°C	-

Characteristics	
Processing	• Injection Molding
Delivery form	• Pellets
Special characteristics	• Heat stabilized or stable to heat
Regional Availability	• Europe • Near East/Africa

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa




DuPont™ Zytel® FE270038 BK267


NYLON RESIN

Diagrams

Viscosity-shear rate

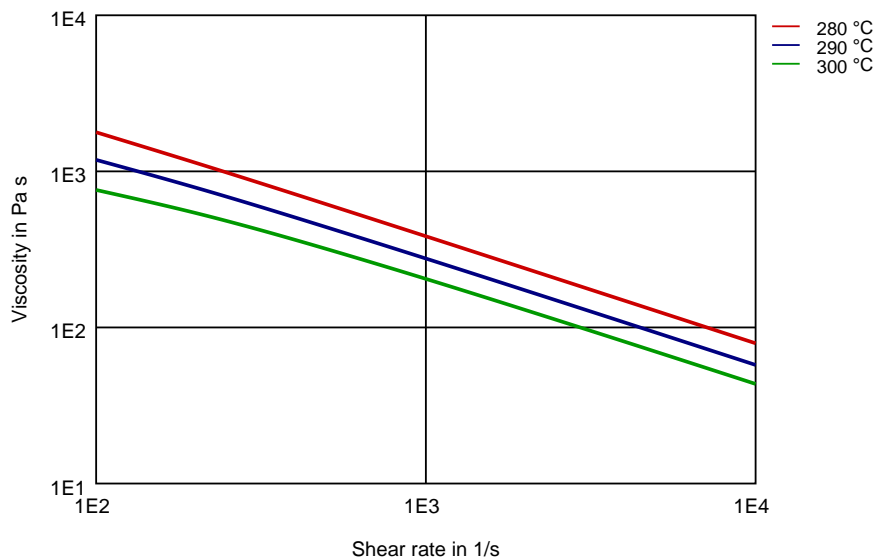


Shearstress-shear rate

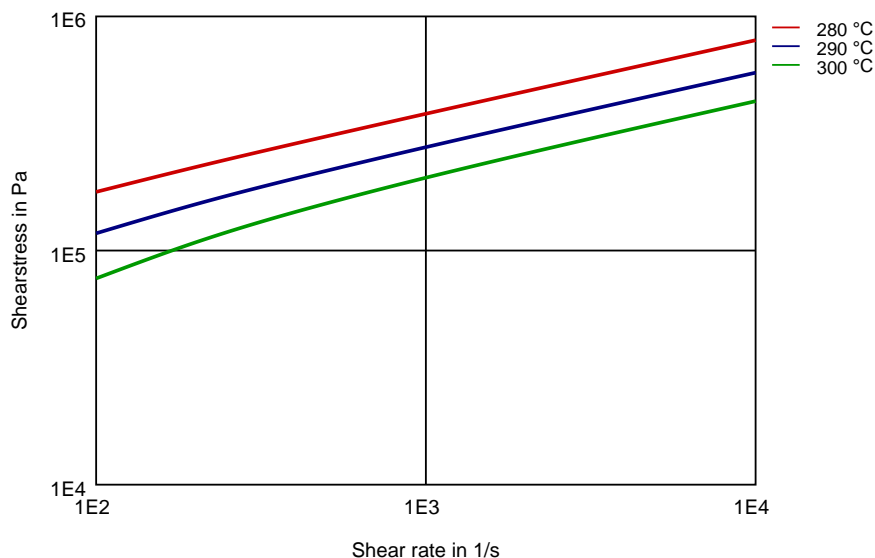


DuPont™ Zytel® FE270038 BK267

NYLON RESIN

Dynamic Shear modulus-temperature (dry)

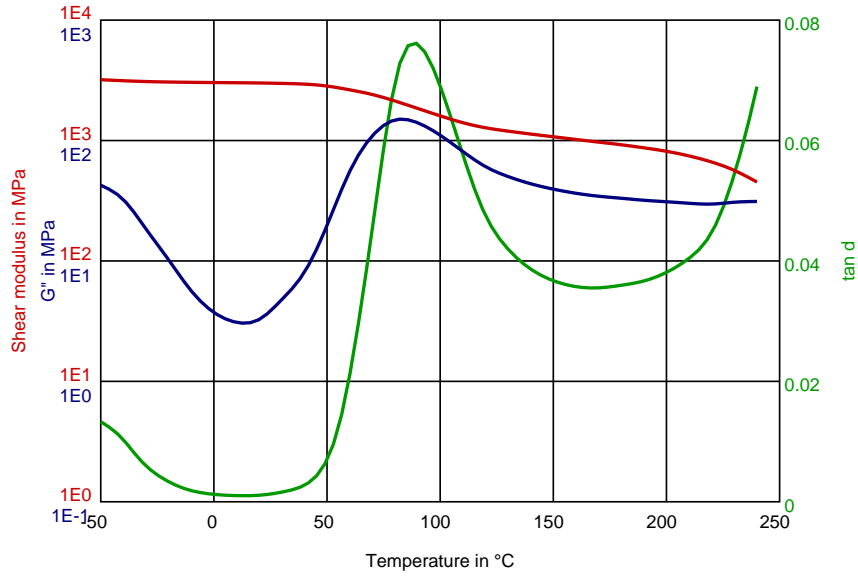

Dynamic Shear modulus-temperature (cond.)

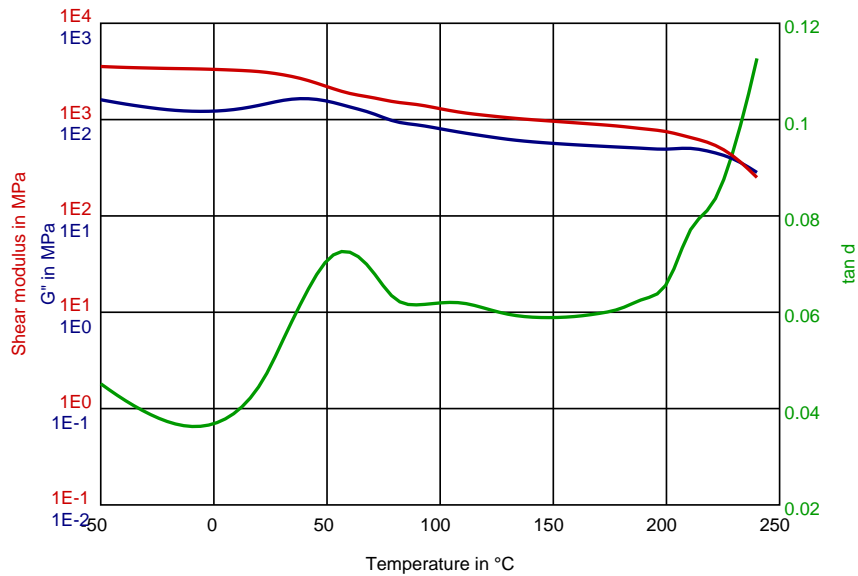

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa




DuPont™ Zytel® FE270038 BK267

NYLON RESIN

Dynamic Tensile modulus-temperature (dry)

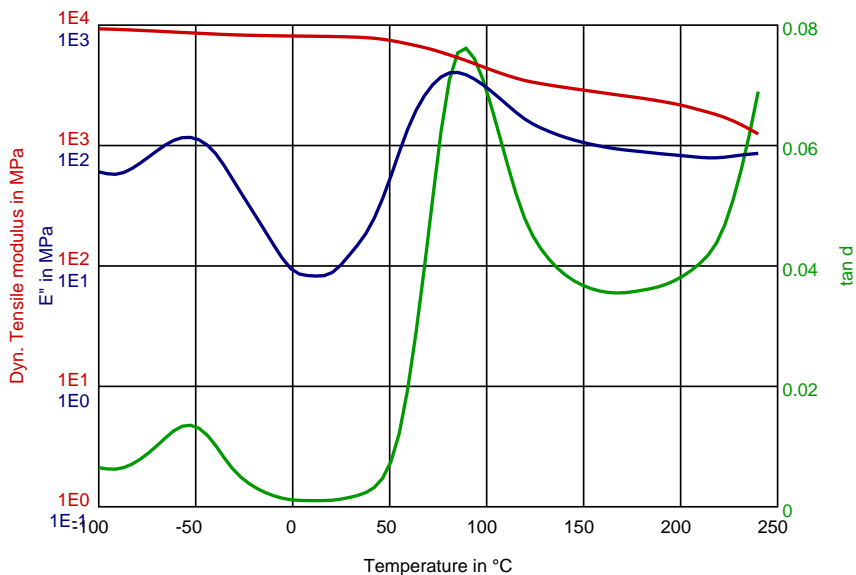


Dynamic Tensile modulus-temperature (cond.)

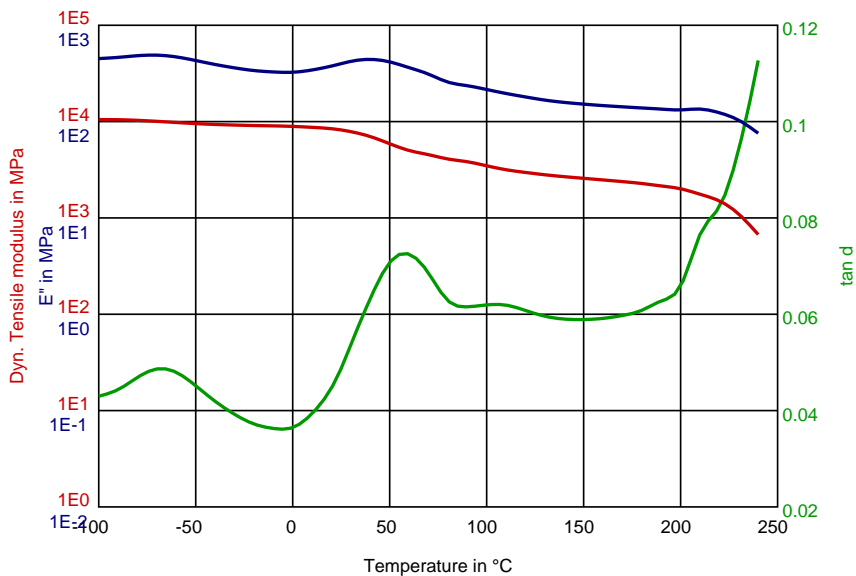

DuPont™ Zytel® FE270038 BK267 NYLON RESIN

Stress-strain (dry)

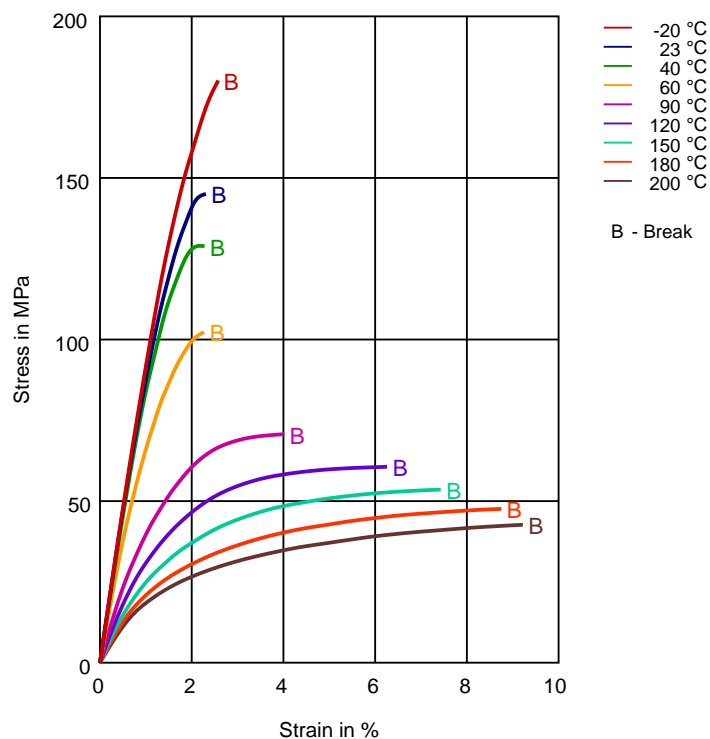

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® FE270038 BK267

NYLON RESIN

Stress-strain (cond.)

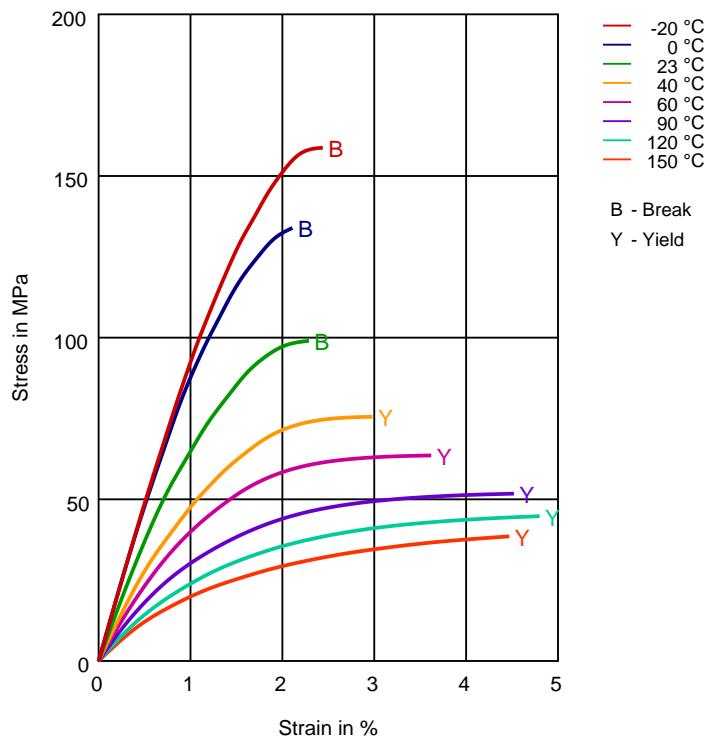

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific


TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa



DuPont™ Zytel® FE270038 BK267 NYLON RESIN

Secant modulus-strain (dry)

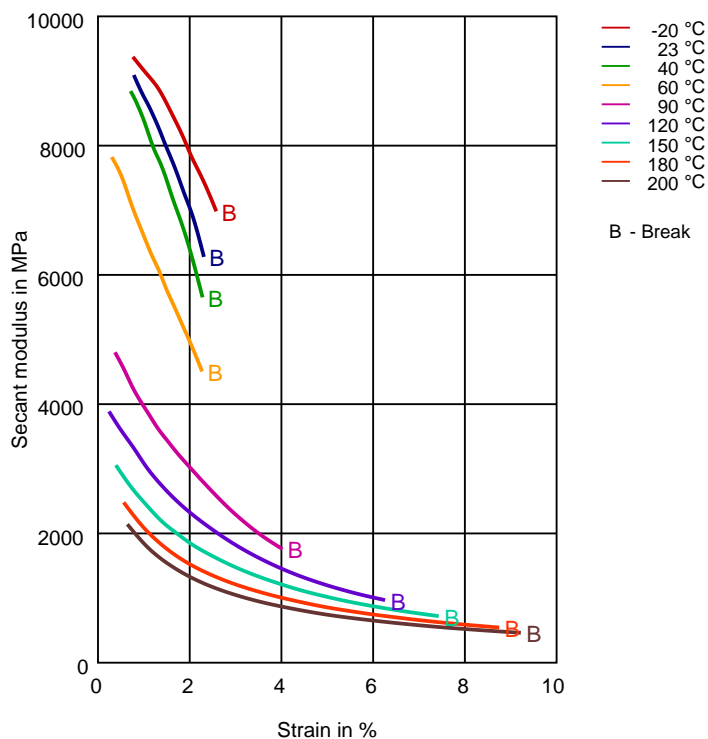

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® FE270038 BK267

NYLON RESIN

Secant modulus-strain (cond.)

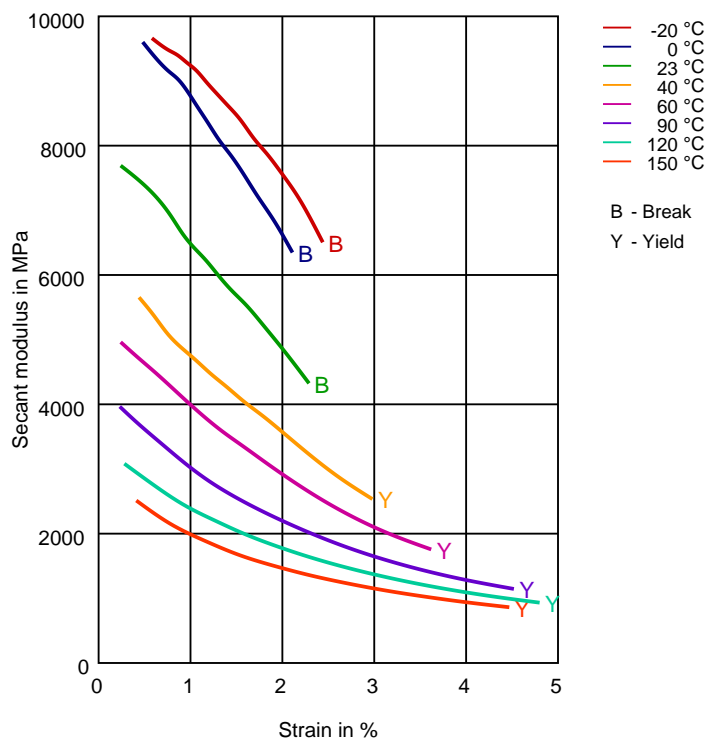

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific


TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa



DuPont™ Zytel® FE270038 BK267 NYLON RESIN

Stress-strain (isochronous) 23°C(cond.)

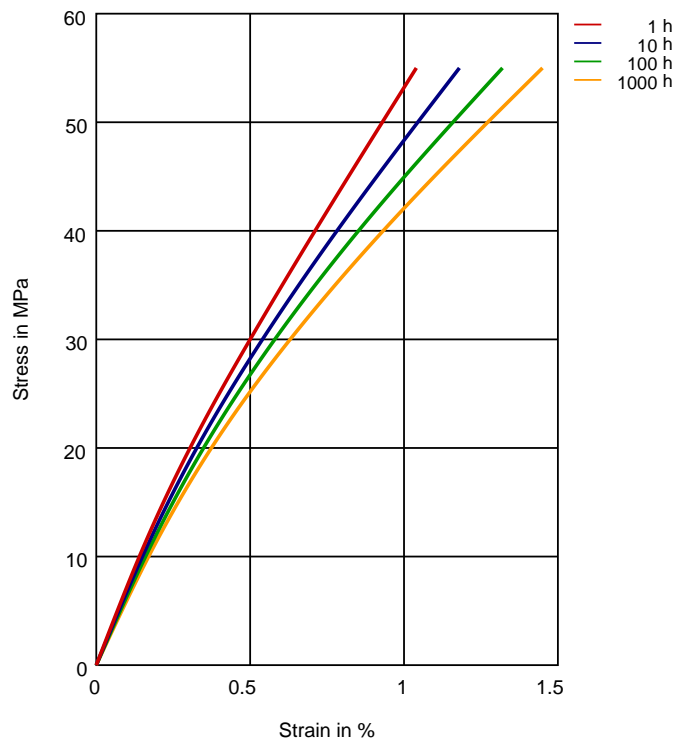

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa




DuPont™ Zytel® FE270038 BK267

NYLON RESIN

Creep modulus-time 23 °C (cond.)

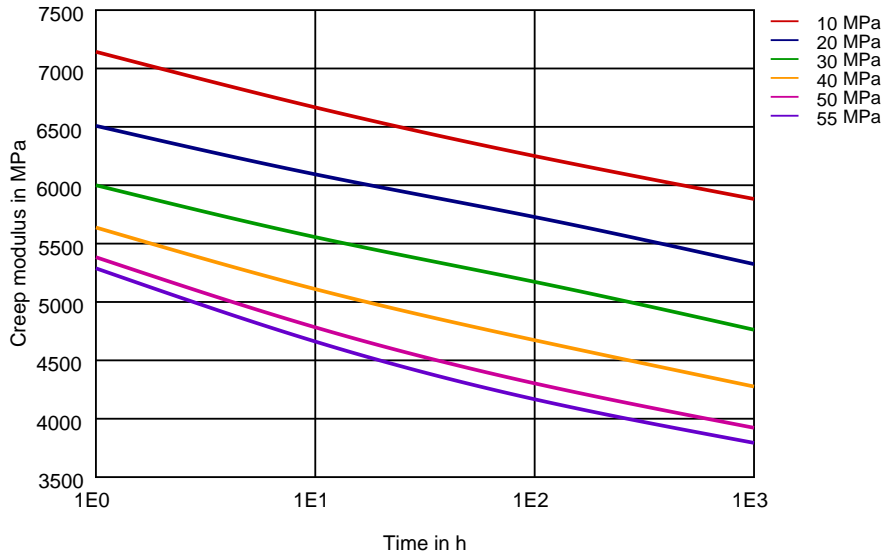

Specific volume-temperature (pvT)

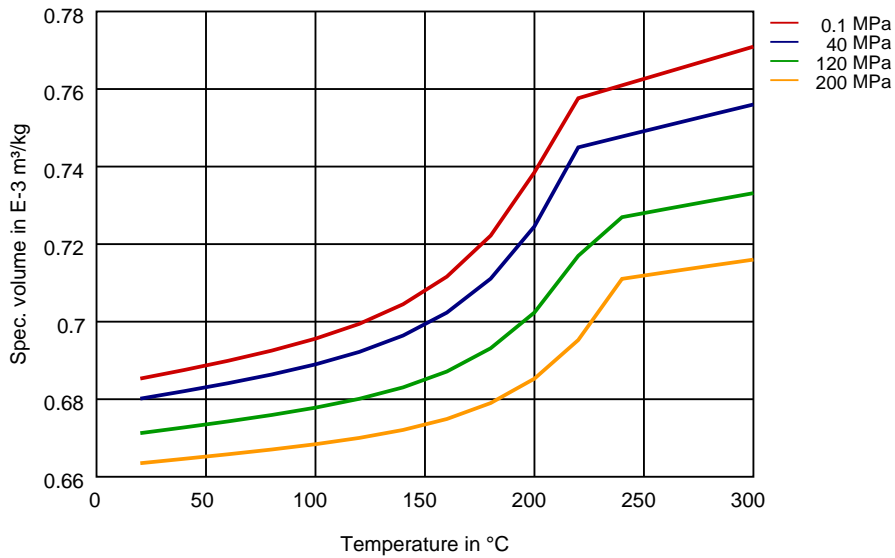

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa




DuPont™ Zytel® FE270038 BK267

NYLON RESIN

Tensile modulus-temperature (dry)

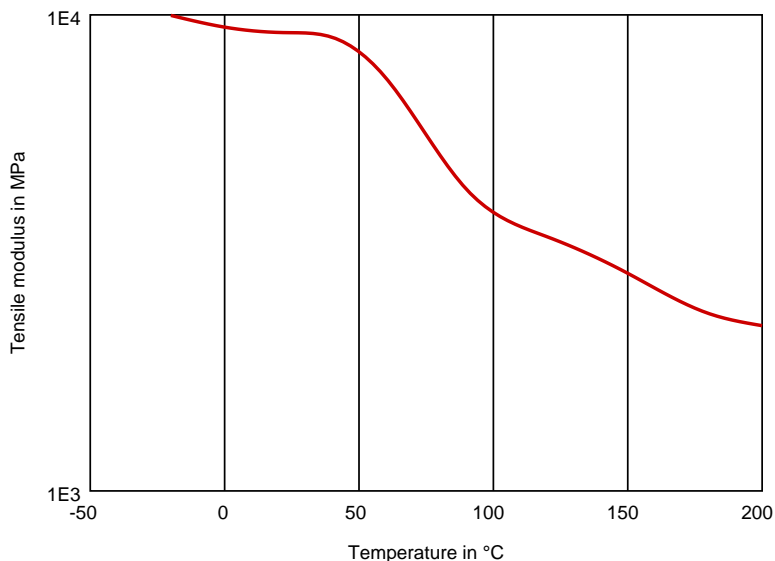

Tensile modulus-temperature (cond.)

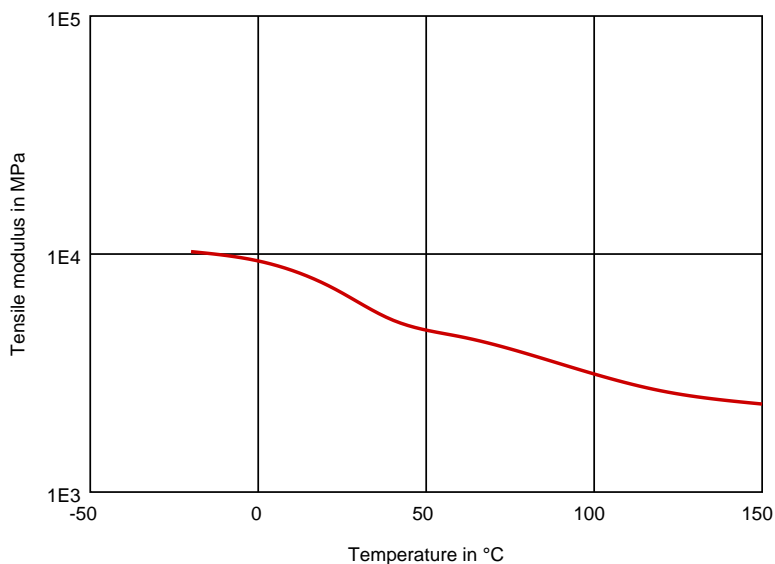

Contact DuPont for Material Safety Data Sheet, general guides and/or additional information about ventilation, handling, purging, drying, etc. ISO Mechanical properties measured at 160 mil (Hytrel® measured at 80 mil), IEC Electrical properties measured at 80 mil, all ASTM properties measured at 120 mil, and test temperatures are 73°F unless otherwise stated.

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa



DuPont™ Zytel® FE270038 BK267

NYLON RESIN

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents. Caution: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont customer representative and read Medical Caution H-50103-5.

Copyright © 2017 DuPont or its affiliates. All Rights Reserved. The DuPont Oval Logo, DuPont™, The miracles of science™ and all products denoted with ® or ™ are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates.

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa

