

DuPont™ Zytel® HTN51G35HSL BK083

HIGH PERFORMANCE POLYAMIDE RESIN

产品

Zytel® HTN51G35HSL BK083是一种35% 玻纤增强, 高温尼龙, 高性能聚酰胺

总说明	数值	单位	测试标准
树脂鉴别	PA6T/XT-GF35	-	ISO 1043
产品标识码	PA6T/XT-GF35	-	ISO 11469
产品标识码	>PPA-GF35<	-	SAE J1344
流变性能	干态/调节后	单位	测试标准
粘数	100 ^[1] / *	cm ³ /g	ISO 307, 1157, 1628
模塑收缩率, 平行	0.2 / -	%	ISO 294-4, 2577
模塑收缩率, 垂直	0.6 / -	%	ISO 294-4, 2577
1: formic acid 90%			
机械性能	干态/调节后	单位	测试标准
拉伸模量	12000 / 11500	MPa	ISO 527-1/-2
断裂应力	210 / 210	MPa	ISO 527-1/-2
断裂伸长率	2.4 / 2.3	%	ISO 527-1/-2
弯曲模量	10300 / 10300	MPa	ISO 178
无缺口简支梁冲击强度			ISO 179/1eU
+23°C	70 / -	kJ/m ²	
-30°C	70 / 40	kJ/m ²	
简支梁缺口冲击强度			ISO 179/1eA
+23°C	10 / -	kJ/m ²	
-30°C	10 / 9	kJ/m ²	
-40°C	9 / -	kJ/m ²	
悬臂梁缺口冲击强度			ISO 180/1A
23°C	10 / -	kJ/m ²	
-30°C	8 / -	kJ/m ²	
无缺口悬臂梁冲击强度			ISO 180/1U
23°C	65 / -	kJ/m ²	
-30°C	67 / -	kJ/m ²	
热性能	干态/调节后	单位	测试标准
熔融温度	300 / *	°C	ISO 11357-1/-3
热变形温度			ISO 75-1/-2
1.80 MPa	264 / *	°C	
0.45 MPa	284 / *	°C	
线膨胀系数, 平行	18 / *	E-6/K	ISO 11359-1/-2
线膨胀系数			ISO 11359-1/-2
垂直	60 / *	E-6/K	
垂直, -40-23°C	57 / *	E-6/K	
垂直, 55-160°C	72 / *	E-6/K	
平行, -40-23°C	20 / *	E-6/K	
相对温度指数, 电气性能			UL 746B
0.75mm	150 / *	°C	
1.5mm	150 / *	°C	
3mm	150	°C	
相对温度指数, 冲击性能			UL 746B
0.75mm	125	°C	
1.5mm	125 / *	°C	
3mm	130	°C	
相对温度指数, 强度			UL 746B
0.75mm	130	°C	
1.5mm	140 / *	°C	
3mm	150	°C	

修订: 2018-07-19

Page: 1 of 8

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Asia Pacific

Europe/Middle East/Africa

DONGGUAN FUMEI PLASTICS CO.,LTD.

TEL: +86 0769-82339888 / 87798999

EMAIL: fumei@foomx.com

Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.



DuPont™ Zytel® HTN51G35HSL BK083

HIGH PERFORMANCE POLYAMIDE RESIN

燃烧性能	干态/调节后	单位	测试标准
1.5mm名义厚度时的燃烧性	HB / *	class	IEC 60695-11-10
测试用试样的厚度	1.5 / *	mm	IEC 60695-11-10
UL注册	yes / *	-	UL 94
厚度为h时的燃烧性	HB / *	class	IEC 60695-11-10
测试用试样的厚度	0.85 / *	mm	IEC 60695-11-10
UL注册	yes / *	-	UL 94
燃烧性 - 氧指数	26 / *	%	ISO 4589-1/-2
灼热丝可燃指数			IEC 60695-2-12
1.5mm	750 / -	°C	
3mm	960 / -	°C	
灼热丝起燃温度			IEC 60695-2-13
1.5mm	775 / -	°C	
3mm	800 / -	°C	
FMVSS Class	B	-	ISO 3795 (FMVSS 302)
燃烧速率, 厚度: 1毫米	21	mm/min	ISO 3795 (FMVSS 302)
电性能	干态/调节后	单位	测试标准
相对介电常数.			IEC 62631-2-1
100Hz	4 / -	-	
1MHz	3.8 / -	-	
介质损耗因子			IEC 62631-2-1
100Hz	90 / -	E-4	
1MHz	170 / -	E-4	
体积电阻率	>1E13 / -	Ohm*m	IEC 62631-3-1
相对漏电起痕指数	600 / -	-	IEC 60112
其它性能	干态/调节后	单位	测试标准
密度	1470 / -	kg/m ³	ISO 1183
VDA性能	数值	单位	测试标准
气味测试	4	class	VDA 270
注塑	数值	单位	测试标准
建议干燥	是	-	-
干燥温度	≥ 100	°C	-
干燥时间, 除湿干燥机	6 - 8	h	-
加工前水分含量	≤ 0.1	%	-
最优熔体温度	325	°C	-
注塑 熔体温度	320	°C	-
注塑 熔体温度	330	°C	-
最优模具温度	150	°C	-
模具温度	140 ^[2]	°C	-
模具温度	180	°C	-

2: Higher temperature needed for thinner sections.

典型数据

加工方法	• 注塑		
特殊性能	• 热稳定、耐热的		
地区供应	• 北美	• 亚太	• 中东/非洲
	• 欧洲	• 中南美洲	• Global

成型

注塑

During molding, use proper protective equipment and adequate ventilation. Avoid exposure to fumes and limit the hold up time and temperature of the resin in the machine. Purge degraded resin carefully with HDPE.

When lower mold temperatures are used, the initial warpage and shrinkage may be lower, but the surface appearance and chemical resistance may be reduced, and the dimensional change may be greater when parts are subsequently heated.

修订: 2018-07-19

Page: 2 of 8

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Asia Pacific

Europe/Middle East/Africa

DONGGUAN FUMEI PLASTICS CO.,LTD.

TEL: +86 0769-82339888 / 87798999

EMAIL: fumei@foomx.com

Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.



DuPont™ Zytel® HTN51G35HSL BK083

HIGH PERFORMANCE POLYAMIDE RESIN

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa




DuPont™ Zytel® HTN51G35HSL BK083

HIGH PERFORMANCE POLYAMIDE RESIN

图表

应力 - 应变. (干)

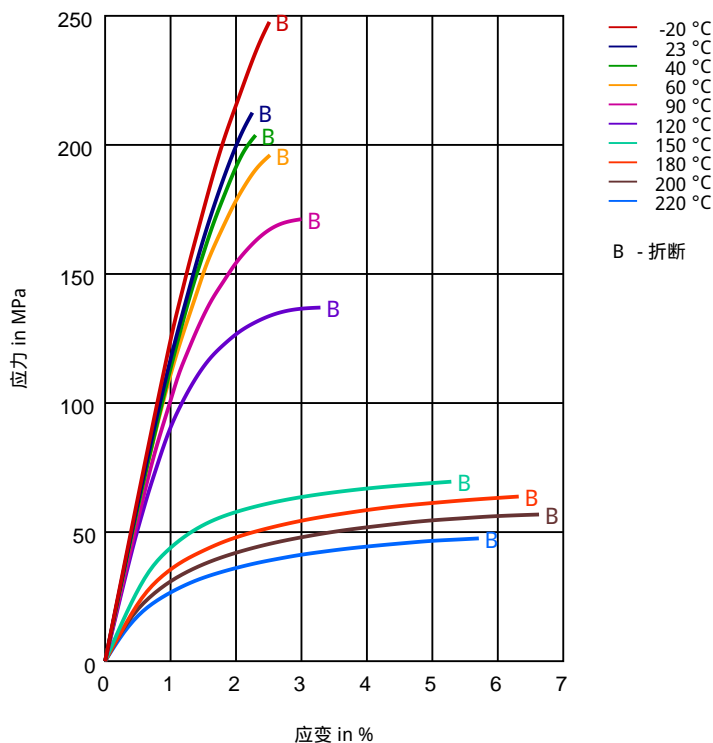

修订：2018-07-19

Page: 4 of 8

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa


Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.



DuPont™ Zytel® HTN51G35HSL BK083

HIGH PERFORMANCE POLYAMIDE RESIN

应力 - 应变. (湿)

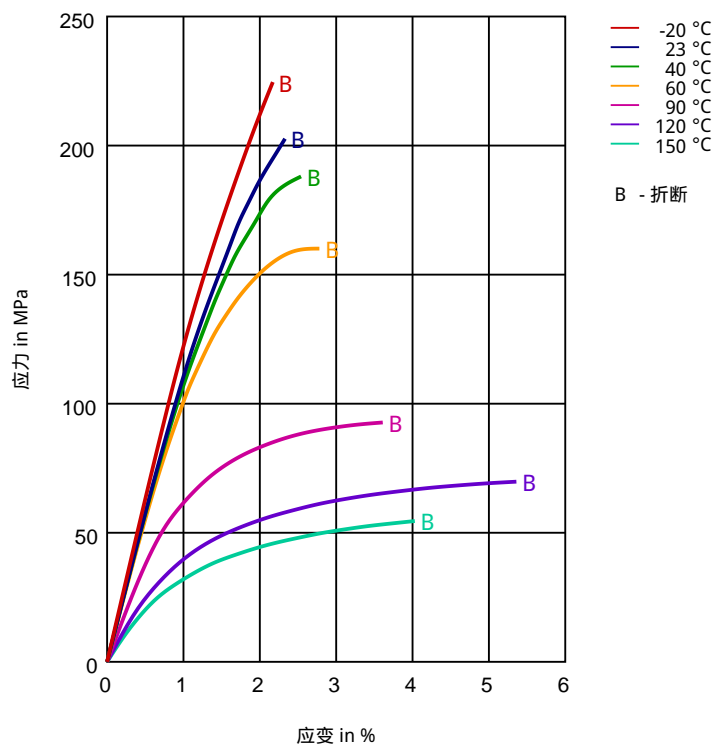

修订：2018-07-19

Page: 5 of 8

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa


Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.



DuPont™ Zytel® HTN51G35HSL BK083

HIGH PERFORMANCE POLYAMIDE RESIN

正割模量 - 应变. (干)

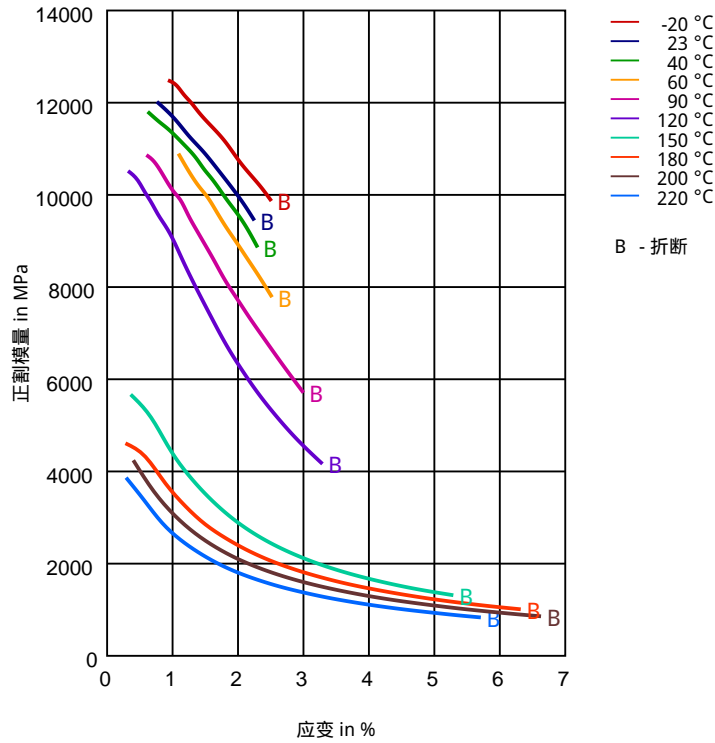

修订：2018-07-19

Page: 6 of 8

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Asia Pacific

Europe/Middle East/Africa

DONGGUAN FUMEI PLASTICS CO.,LTD.

TEL: +86 0769-82339888 / 87798999

EMAIL: fumei@foomx.com


Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.



DuPont™ Zytel® HTN51G35HSL BK083

HIGH PERFORMANCE POLYAMIDE RESIN

正割模量 - 应变. (湿)

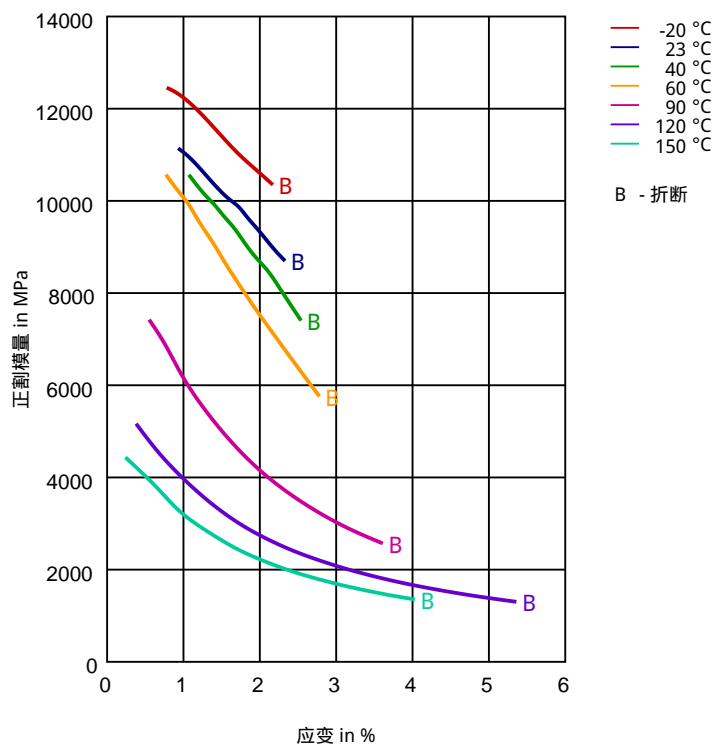

修订：2018-07-19

Page: 7 of 8

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa

Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.



DuPont™ Zytel® HTN51G35HSL BK083

HIGH PERFORMANCE POLYAMIDE RESIN

耐化学性

其它

- ✓ 乙二醇水溶液 (50g/100g) (108°C)
- ✓ 水 (23°C)
- ✓ 去离子水 (90°C)
- ✓ 冷却Glysantin G48 , 1:1水环境 (125°C)

Symbols used:

- ✓ possibly resistant

Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).

- X not recommended - see explanation

Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).

联系杜邦以获得材料安全物性数据表、一般指南和/或其他关于排风、处理、清洗、干燥等的相关信息。除非特别指定，ISO机械性能测试样条厚度为4mm (Hytrel® 2mm)，IEC电性能测试样品厚度为2mm，所有的ASTM性能测试样条厚度为3.2mm，测试温度为23°C。

这里阐明的信息是免费提供的，基于杜邦认为可靠的技术数据且在材料性能的通常范围内。仅供具有专业技能的人使用，由其自行判断和承担风险。

这些数据不可以用作以建立技术说明规范，或者作为设计依据单独使用；我们提供处理预警信息是基于我们理解使用者会自行判断其特殊的使用条件不会对其产生健康或者安全危害。

由于产品使用和废弃的条件超出了本公司的控制范围，本公司对于本信息的使用不做任何保证，不论明示或暗示，亦不承担任何责任。

对于任何材料，制定规范前必须在终端使用条件下进行评估。

这里的任何信息不能作为使用专利或者侵犯专利权的许可。

警告：不要用于涉及永久植入人体的医疗应用。

如果需要其他医疗方面的应用，请联系杜邦销售代表并阅读医疗应用警告H-50103-5。

Copyright© 2017杜邦公司版权所有杜邦椭圆形商标，DuPont™, The miracles of science™ and 以及所有标有® 或™ 的产品是杜邦公司或其分支机构关联公司的商标或者注册商标。

