

DuPont™ Zytel® PLS95G35DH1 BK549

ZYTEL® PLUS NYLON RESIN

Product Information

Common features of Zytel® nylon resin include mechanical and physical properties such as high mechanical strength, excellent balance of stiffness and toughness, good high temperature performance, good electrical and flammability properties, good abrasion and chemical resistance. In addition, Zytel® nylon resins are available in different modified and reinforced grades to create a wide range of products with tailored properties for specific processes and end-uses. Zytel® nylon resin, including most flame retardant grades, offer the ability to be coloured.

The good melt stability of Zytel® nylon resin normally enables the recycling of properly handled production waste. If recycling is not possible, DuPont recommends, as the preferred option, incineration with energy recovery (-31kJ/g of base polymer) in appropriately equipped installations. For disposal, local regulations have to be observed.

Zytel® nylon resin typically is used in demanding applications in the automotive, furniture, domestic appliances, sporting goods and construction industry.

Zytel® PLS95G35DH1 is a high flow, 35% glass fiber reinforced, DuPont™ SHIELD protected polyamide resin for injection molding. It provides excellent surface appearance, excellent welding, excellent fatigue retention and exceptional resistance to hot air and hot oil.

General information	Value	Unit	Test Standard
Resin Identification	PA66/6T-GF35	-	ISO 1043
Part Marking Code	PA66/6T-GF35	-	ISO 11469
Rheological properties	dry / cond	Unit	Test Standard
Viscosity number	130 ⁽¹⁾ / *	cm ³ /g	ISO 307, 1157, 1628
Molding shrinkage, parallel	0.2 / -	%	ISO 294-4, 2577
Molding shrinkage, normal	0.7 / -	%	ISO 294-4, 2577
1: sulphuric acid 96%			
Mechanical properties	dry / cond	Unit	Test Standard
Tensile Modulus	11000 / 8000	MPa	ISO 527-1/-2
Stress at break	200 / 140	MPa	ISO 527-1/-2
Strain at break	3.3 / 6	%	ISO 527-1/-2
Charpy impact strength			ISO 179/1eU
73 °F	80 / 90	kJ/m ²	
-22 °F	70 / 70	kJ/m ²	
Charpy notched impact strength			ISO 179/1eA
73 °F	13 / 14	kJ/m ²	
-40 °F	12 / -	kJ/m ²	
Thermal properties	dry / cond	Unit	Test Standard
Melting temperature, 18 °F/min	267 / *	°C	ISO 11357-1/-3
Glass transition temperature, 18 °F/min	85 / -	°C	ISO 11357-1/-2
Temp. of deflection under load			ISO 75-1/-2
260 psi	242 / *	°C	
65 psi	261 / *	°C	
Coeff. of linear therm. expansion, parallel	18 / *	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	72 / *	E-6/K	ISO 11359-1/-2
Thermal conductivity of melt	0.22	W/(m K)	-
Spec. heat capacity of melt	2300	J/(kg K)	-
Flammability	dry / cond	Unit	Test Standard
Burning Behav. at 60mil nom. thickn.	HB / *	class	IEC 60695-11-10
Thickness tested	1.5 / *	mm	IEC 60695-11-10
FMVSS Class	B	-	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	44	mm/min	ISO 3795 (FMVSS 302)
Other properties	dry / cond	Unit	Test Standard
Humidity absorption, 80mil	1.8 / *	%	Sim. to ISO 62
Water absorption, 80mil	6 / *	%	Sim. to ISO 62
Density	1430 / -	kg/m ³	ISO 1183
Density of melt	1260	kg/m ³	-

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Asia Pacific

Europe/Middle East/Africa

DONGGUAN FUMEI PLASTICS CO.,LTD.

TEL: +86 0769-82339888 / 87798999

EMAIL: fumei@foomx.com



DuPont™ Zytel® PLS95G35DH1 BK549

ZYTEL® PLUS NYLON RESIN

Injection	dry / cond	Unit	Test Standard
Drying Recommended	yes	-	-
Drying Temperature	≥80	°C	-
Drying Time, Dehumidified Dryer	2 - 4	h	-
Processing Moisture Content	≤0.2	%	-
Melt Temperature Optimum	285	°C	-
Min. melt temperature	280	°C	-
Max. melt temperature	290	°C	-
Max. screw tangential speed	0.2 / *	m/s	-
Mold Temperature Optimum	100	°C	-
Min. mold temperature	70	°C	-
Max. mold temperature	120	°C	-
Hold pressure range	50 - 100	MPa	-
Hold pressure time	3	s/mm	-
Ejection temperature	210	°C	-

Characteristics			
Processing	• Injection Molding		
Delivery form	• Pellets		
Additives	• Release agent		
Special characteristics	• Heat stabilized or stable to heat		
Regional Availability	• North America • Europe	• Asia Pacific • South and Central America	• Near East/Africa • Global

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa




DuPont™ Zytel® PLS95G35DH1 BK549


ZYTEL® PLUS NYLON RESIN

Diagrams

Viscosity-shear rate

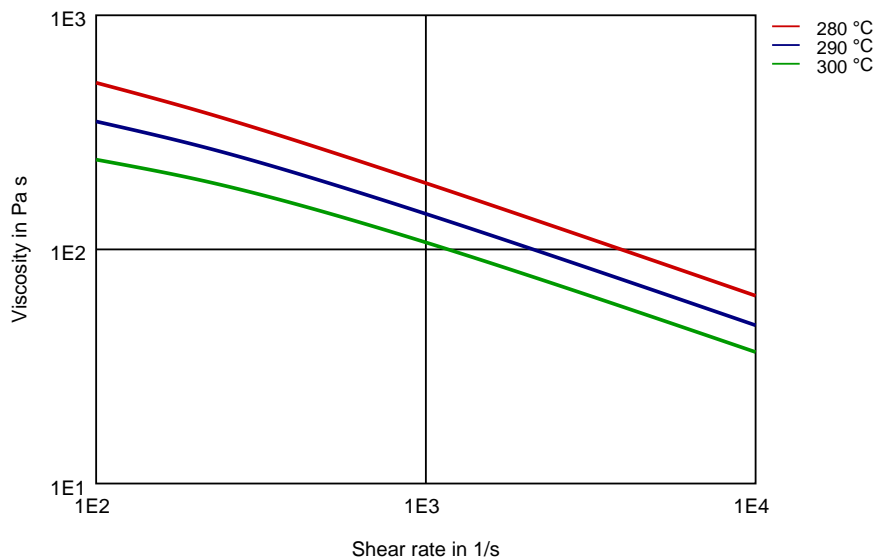


Shearstress-shear rate

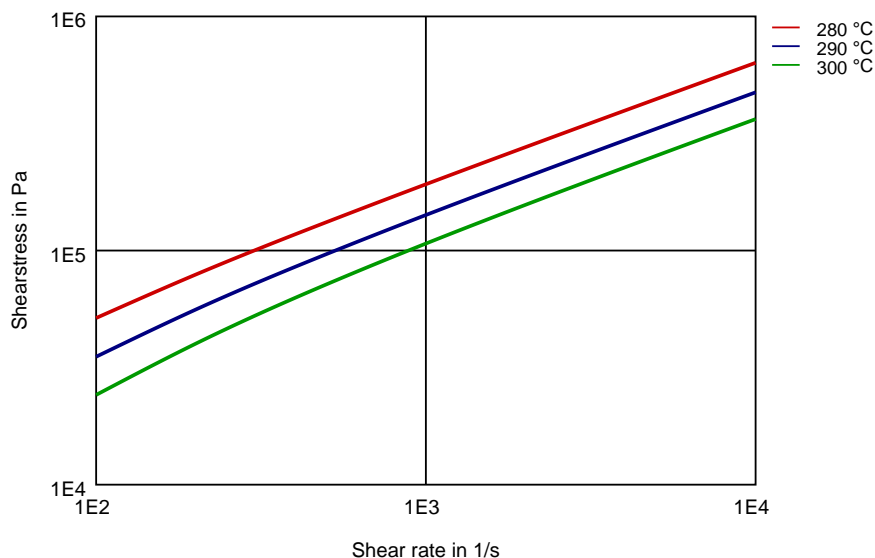

DuPont™ Zytel® PLS95G35DH1 BK549

ZYTEL® PLUS NYLON RESIN

Dynamic Tensile modulus-temperature (dry)

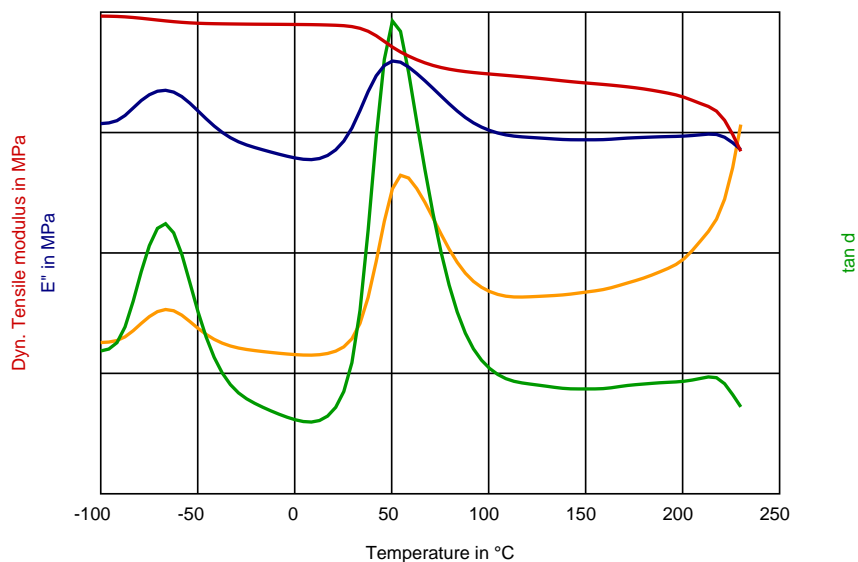

Revised: 2018-07-23

Page: 4 of 20

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa


Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.



DuPont™ Zytel® PLS95G35DH1 BK549

ZYTEL® PLUS NYLON RESIN

Stress-strain (dry)

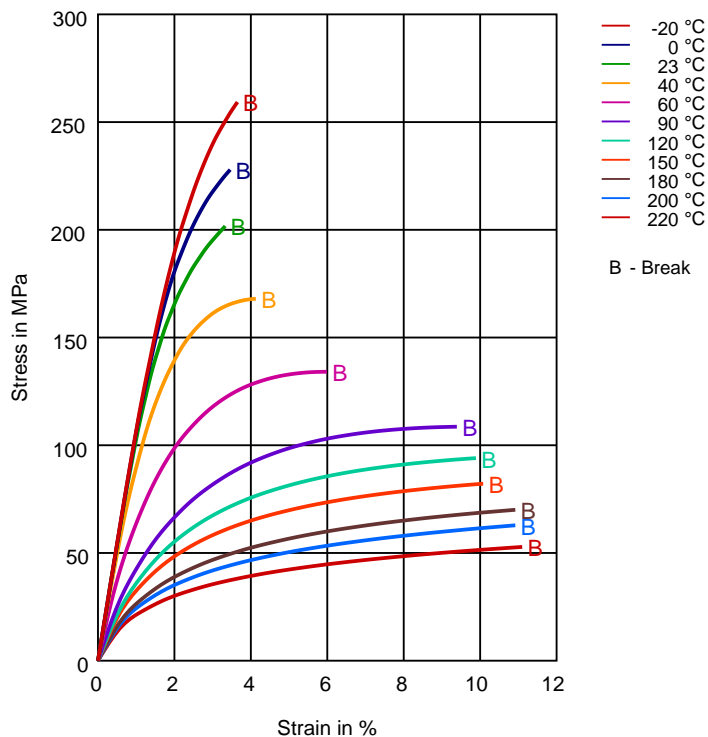

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® PLS95G35DH1 BK549

ZYTEL® PLUS NYLON RESIN


Stress-strain (cond.)

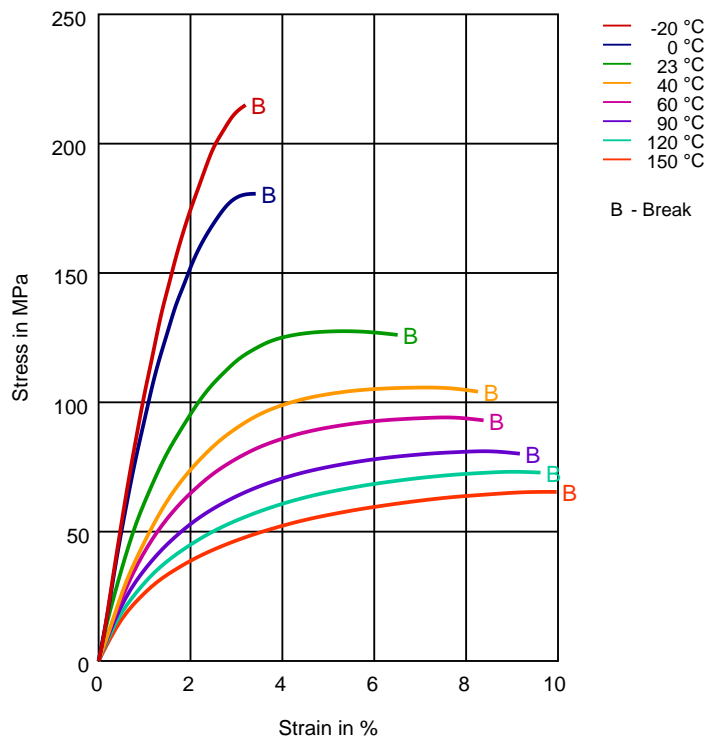

DuPont™ Zytel® PLS95G35DH1 BK549

ZYTEL® PLUS NYLON RESIN

Secant modulus-strain (dry)

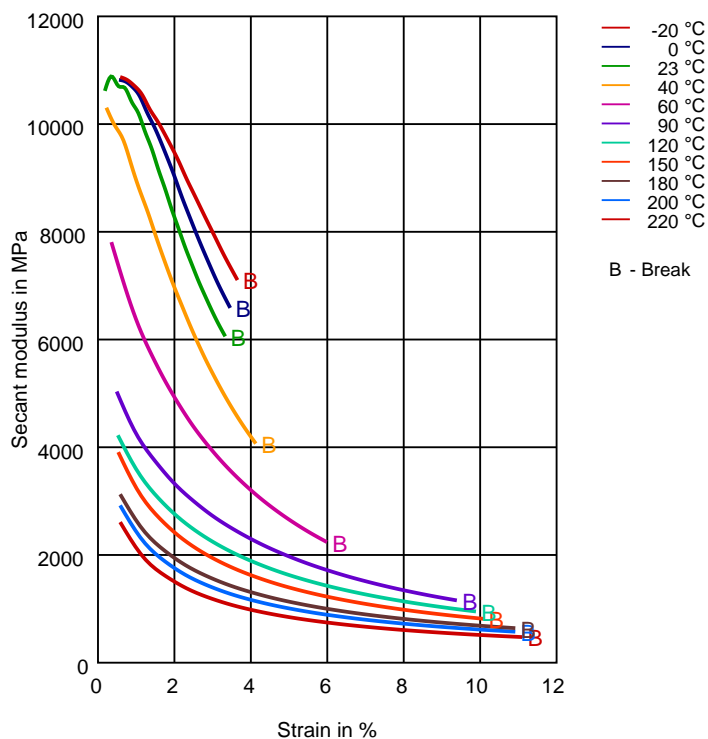

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® PLS95G35DH1 BK549

ZYTEL® PLUS NYLON RESIN

Secant modulus-strain (cond.)

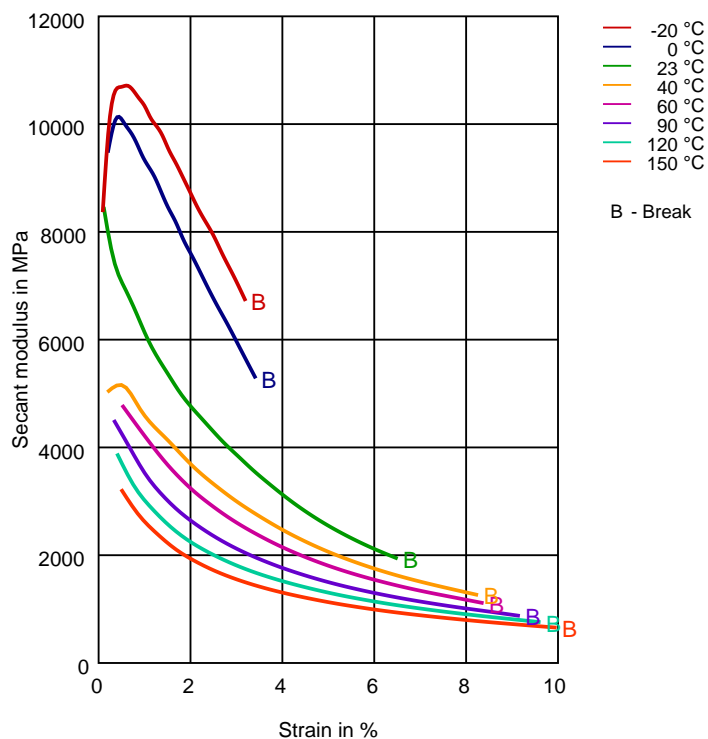

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® PLS95G35DH1 BK549

ZYTEL® PLUS NYLON RESIN

Stress-strain (isochronous) 23°C(cond.)

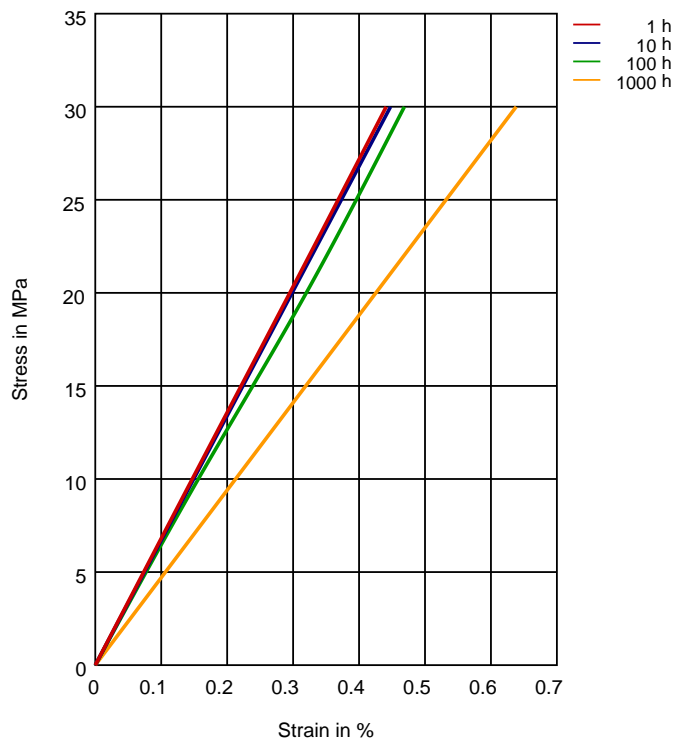

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® PLS95G35DH1 BK549

ZYTEL® PLUS NYLON RESIN

Creep modulus-time 23 °C (cond.)

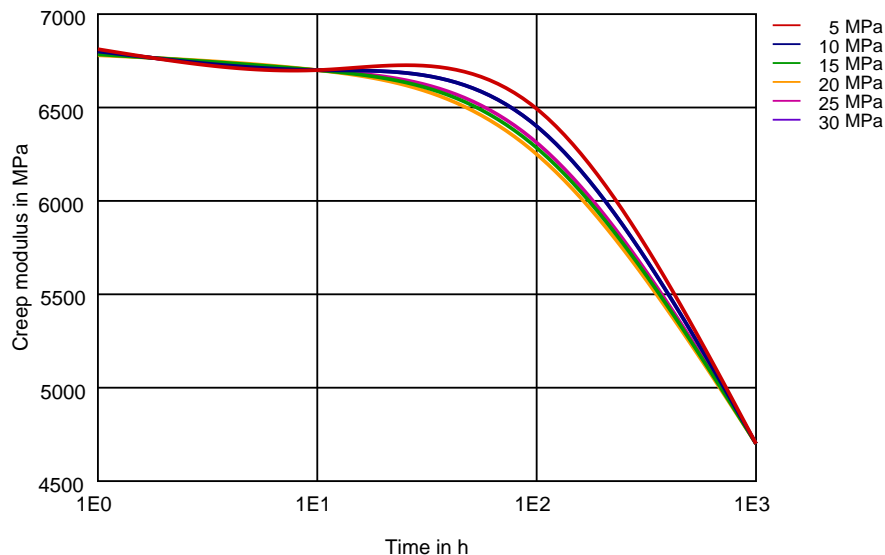

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® PLS95G35DH1 BK549

ZYTEL® PLUS NYLON RESIN

Stress-strain (isochronous) 100°C (dry)

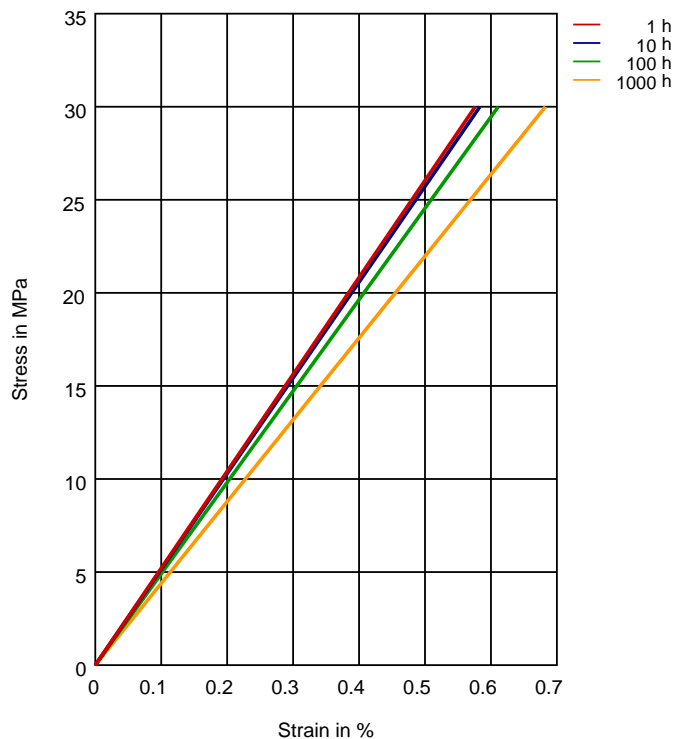

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® PLS95G35DH1 BK549

ZYTEL® PLUS NYLON RESIN

Creep modulus-time 100°C (dry)

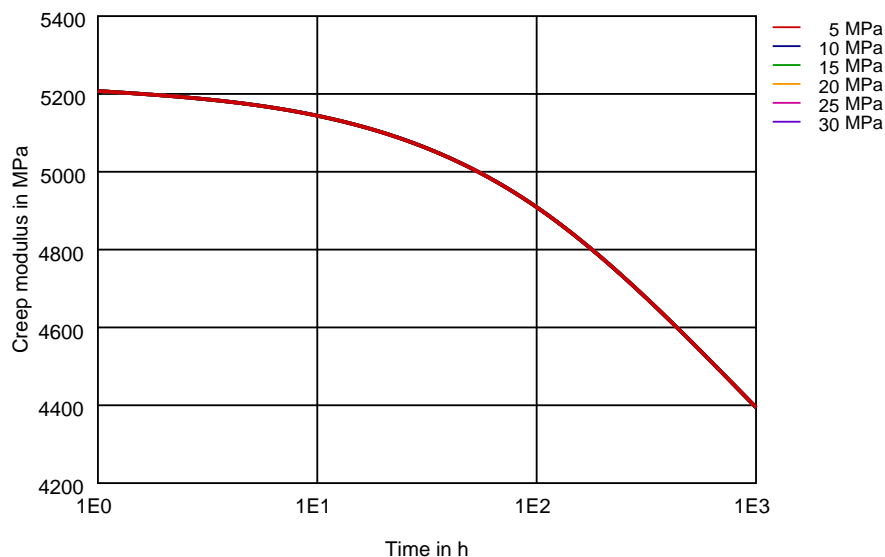

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® PLS95G35DH1 BK549

ZYTEL® PLUS NYLON RESIN

Stress-strain (isochronous) 180°C (dry)

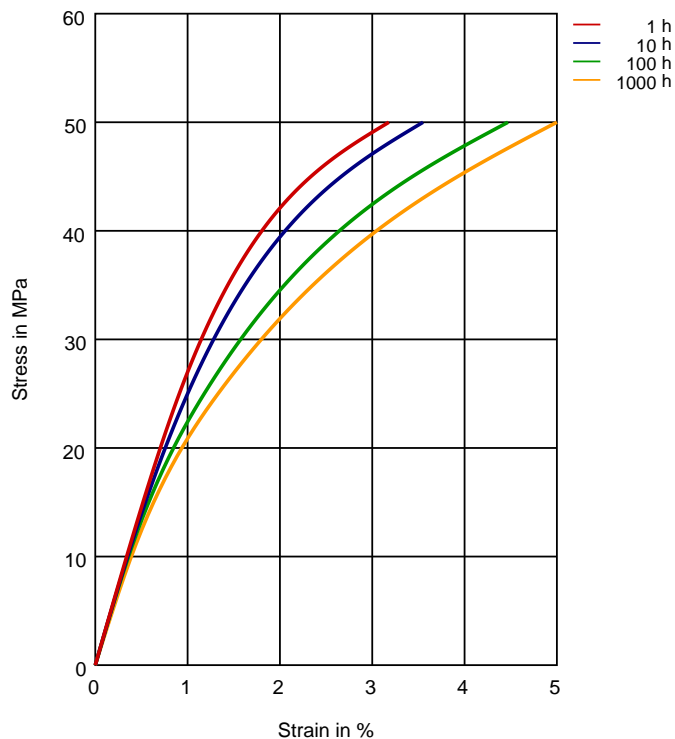

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® PLS95G35DH1 BK549

ZYTEL® PLUS NYLON RESIN

Creep modulus-time 180°C (dry)

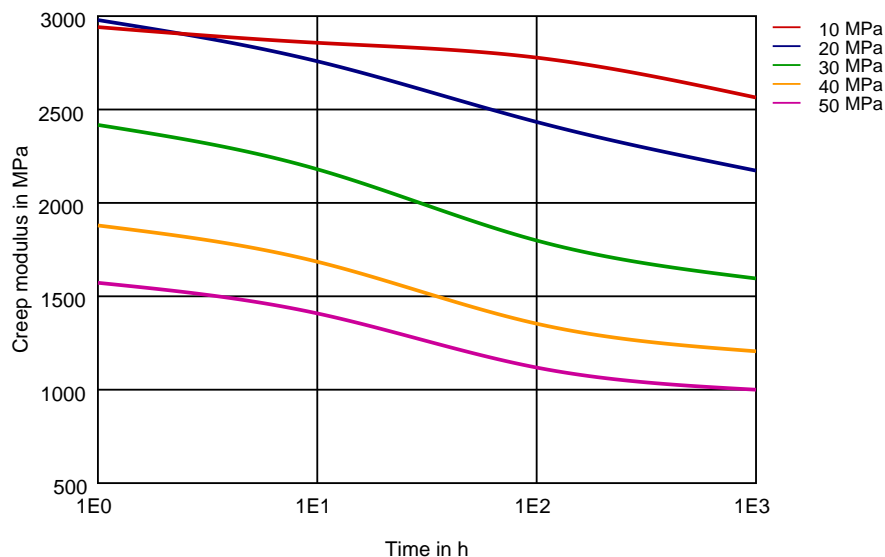

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® PLS95G35DH1 BK549

ZYTEL® PLUS NYLON RESIN

Stress-strain (isochronous) 200°C (dry)

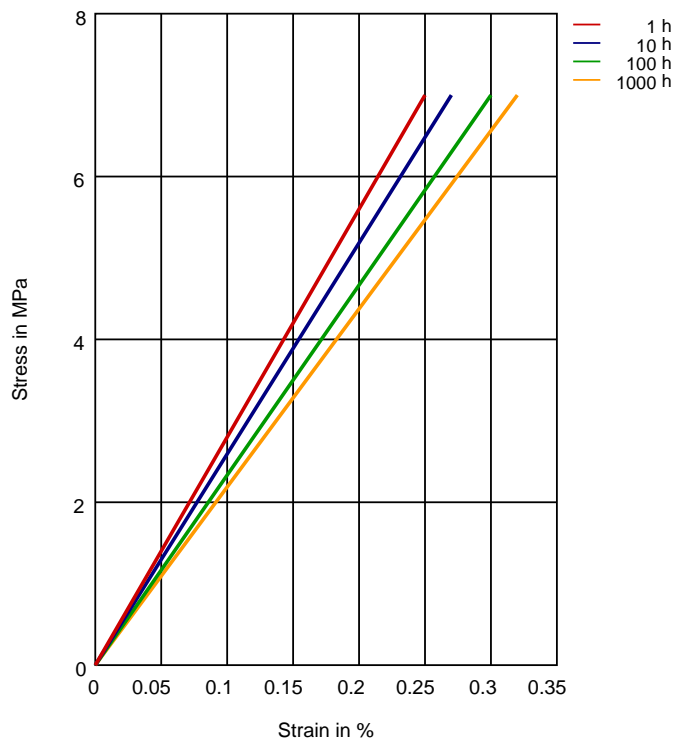

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa




DuPont™ Zytel® PLS95G35DH1 BK549

ZYTEL® PLUS NYLON RESIN

Creep modulus-time 200°C (dry)

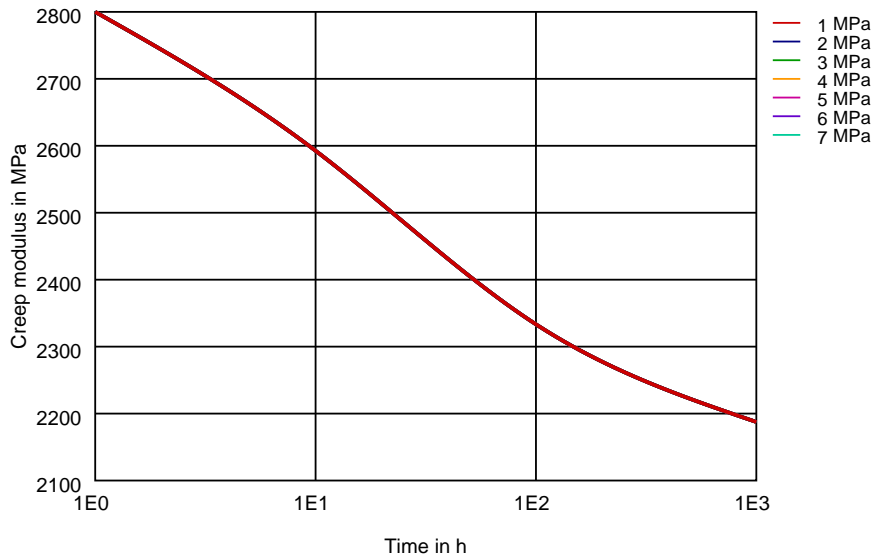

Specific volume-temperature (pvT)

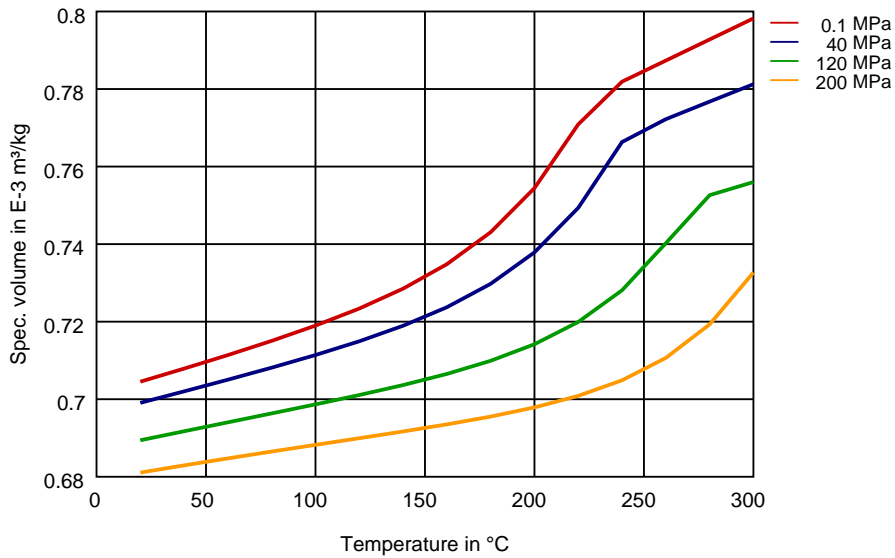

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Asia Pacific

Europe/Middle East/Africa

DONGGUAN FUMEI PLASTICS CO.,LTD.

TEL: +86 0769-82339888 / 87798999

EMAIL: fumei@foomx.com


Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.




DuPont™ Zytel® PLS95G35DH1 BK549

ZYTEL® PLUS NYLON RESIN

Tensile modulus-temperature (dry)

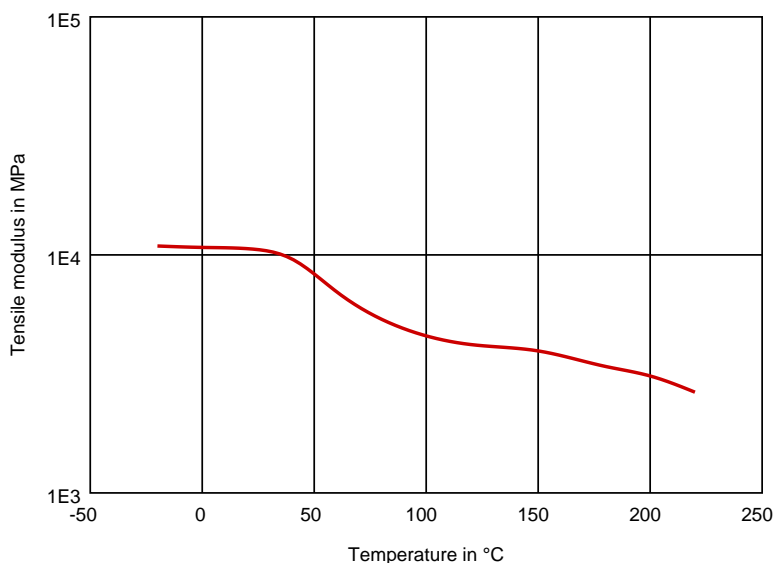

Tensile modulus-temperature (cond.)

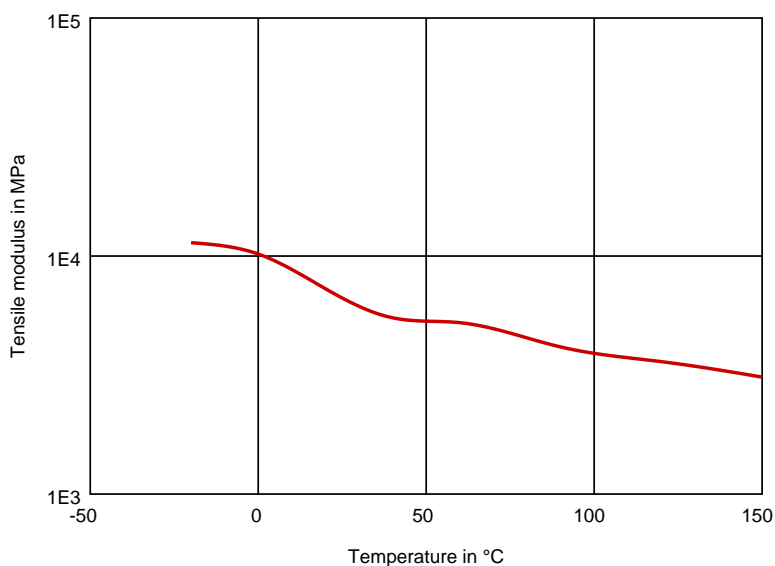

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® PLS95G35DH1 BK549

ZYTEL® PLUS NYLON RESIN

Tensile Fatigue, 10Hz, R=0.1 mm(dry)

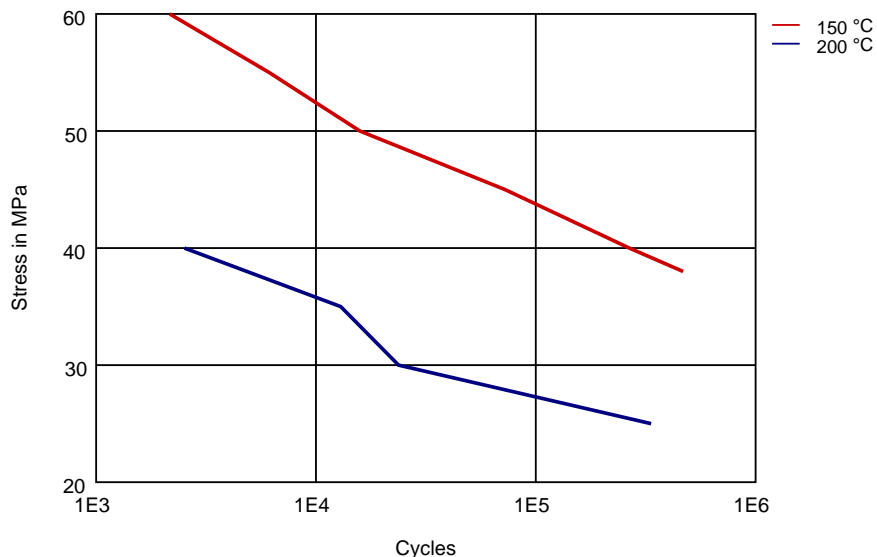

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa



DuPont™ Zytel® PLS95G35DH1 BK549

ZYTEL® PLUS NYLON RESIN

Chemical Media Resistance

Mineral oils

- ✓ SAE 10W40 multigrade motor oil (130°C)

Standard Fuels

- ✓ ISO 1817 Liquid 1 - E5 (60°C)
- ✓ ISO 1817 Liquid 2 - M15E4 (60°C)
- ✓ ISO 1817 Liquid 3 - M3E7 (60°C)
- ✓ ISO 1817 Liquid 4 - M15 (60°C)
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
- ✗ Diesel fuel (pref. ISO 1817 Liquid F) (90°C)
- ✗ Diesel fuel (pref. ISO 1817 Liquid F) (>90°C)

Salt solutions

- ✗ Zinc Chloride solution (50% by mass) (23°C)

Other

- ✓ Water (23°C)
- ✗ Water (90°C)
- ✗ Coolant Glysantin G48, 1:1 in water (125°C)

Symbols used:

- ✓ possibly resistant

Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).

- ✗ not recommended - see explanation

Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).

Contact DuPont for Material Safety Data Sheet, general guides and/or additional information about ventilation, handling, purging, drying, etc. ISO Mechanical properties measured at 160 mil (Hytrel® measured at 80 mil), IEC Electrical properties measured at 80 mil, all ASTM properties measured at 120 mil, and test temperatures are 73°F unless otherwise stated.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents. Caution: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont customer representative and read Medical Caution H-50103-5.

Copyright © 2017 DuPont or its affiliates. All Rights Reserved. The DuPont Oval Logo, DuPont™, The miracles of science™ and all products

Revised: 2018-07-23

Page: 19 of 20

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Asia Pacific

Europe/Middle East/Africa

DONGGUAN FUMEI PLASTICS CO.,LTD.

TEL: +86 0769-82339888 / 87798999

EMAIL: fumei@foomx.com

Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.



DuPont™ Zytel® PLS95G35DH1 BK549

ZYTEL® PLUS NYLON RESIN

denoted with ® or ™ are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates.

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa

